





Refrigeration Equipment Product Overview

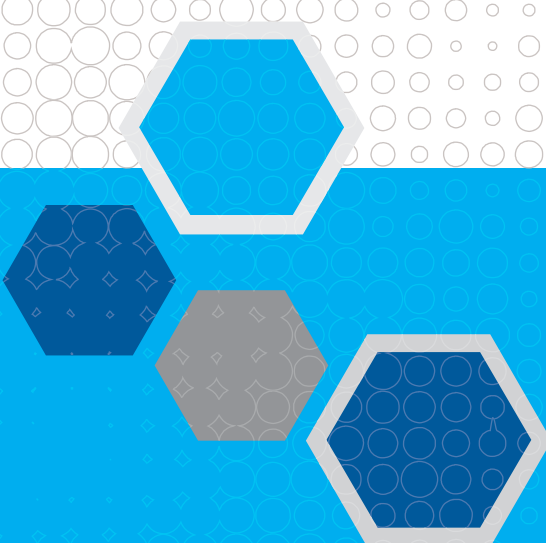

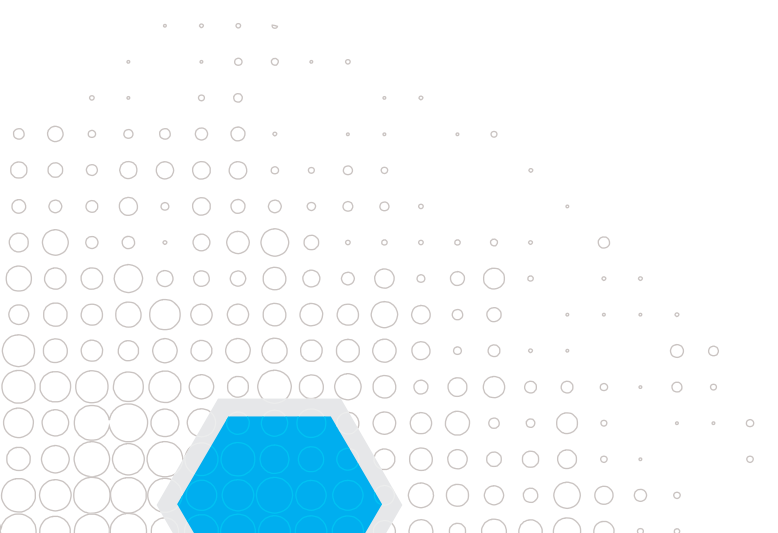

Contents

Racks

eCOBoost CO ₂ Transcritical Rack	6
Sub-critical CO ₂ Rack	6
Traditional Multi-Compressor Rack	6
Specialty Multi-Compressor Rack	7
Screw Compressor Basic Unit Pack	7
Compact Multi-Compressor Rack	7
eCompact CO ₂ Condensing Unit	8
Multiwave Cascade CO ₂ /HFC System	8
Integrated Switchboard System	8

Indoor Units

Nullarbor Condensing Unit	9
Commander Blue High Ambient Condensing Unit	9
Commander Condensing Unit	9

Basic Units

Semi-Hermetic 2 Cylinder	10
Semi-Hermetic 4 & 6 Cylinder	10

Outdoor Units

Polar Pack Condensing Unit	11
Titan Condensing Unit	11
Centurion Condensing Unit	11
Fridgebox™ Microchannel Condensing Unit	12
Digital Scroll Fridgebox™ Microchannel Condensing Unit	12

Drop-In Units


Drop-In Packaged Refrigeration Units	13
--------------------------------------	----

Evaporators

Cabinet Coolers	14
TA Evaporator	14
9000 Series Evaporator	14
3C-A CO ₂ Evaporator	15
Heavy Duty Evaporator	15
NK Heavy Commercial Industrial Unit Cooler	15

Condensers

KRC Remote Condenser	16
WRC Remote Condenser	16
MXW EC Condenser	16

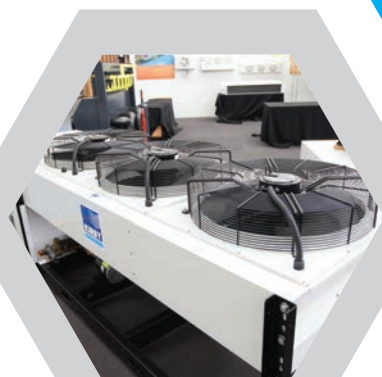



Your HVAC&R Business Partner

Heatcraft is your leading manufacturing and wholesale distribution business servicing the needs of the HVAC & Refrigeration industry across Australia and New Zealand.

Heatcraft has a strong local heritage and presence while being supported globally by our parent company Lennox International Inc.

Our business offers the broadest and most complete range of Refrigeration & HVAC Equipment, Refrigerant and Parts and our customers are supported by a national branch wholesale network and comprehensive technical expertise.

We have a national and international network of account managers and field engineers dedicated to help drive our customers businesses.

Our Parent Company

Around the world, Lennox International Inc. is a respected leader in climate control solutions. It is renowned for its commitment to innovation and technical development dating back to 1895.

Lennox International operates 3 business segments; Lennox Residential Heating and Cooling, Lennox Commercial Heating and Cooling and Heatcraft Worldwide Refrigeration.

- 9 State-of-the-art manufacturing facilities across the U.S, France, Spain, Mexico and China
- 4 production sites all ISO 9001 certified
- French production sites ISO 14001 certified
- 4 Global innovation centres
- 3 Dedicated R&D development centres, all ISO 9001 certified
- 1 ISO 9001 certified, zero emissions Gas2Go decanting and blending facility in NSW, Australia
- Lennox University, providing 700 hours of bespoke training each year
- Internal Computation Fluid Dynamics (CFD) and Finite Element Analysis (FEA) capabilities
- Global sourcing teams dedicated to harnessing global efficiencies
- Access to global HVAC&R market research and trends
- Global sales and marketing resources

Local coverage

Over 70 outlets across AU & NZ

1 National distribution centre

3 Regional distribution centres

Local innovation centre

1 Production site ISO 9001 certified

Over 350 employees



Global connections

\$US3.6 billion in (sales) turnover 2016

9800 employees worldwide

3% of turnover spent on R&D

Operates in 46 countries across 5 continents



Heatcraft exclusively distributes leading and trusted brands to ensure we have all your refrigeration and air-conditioning needs covered:



Kirby delivers an unsurpassed range of precisely engineered refrigeration solutions and has been respected for its toughness, efficiency and reliability for over 90 years.

When you select Kirby you reap the rewards of;

- Design standards that exceed expectations
- Assured design compliance with local standards
- Maximum system efficiency through advanced compressor technologies
- System integration with fully wired system options and control supply/configuration packages
- Capital cost solutions to meet all types of projects and budgets
- Extended warranty options and after-market support



- A global leader in advanced, smart residential and commercial HVAC systems for over 120 years
- Innovative equipment that optimises energy efficiency, cost of ownership and ease of installation
- Our Lennox manufacturing centres in the U.S, France and Spain are among the most advanced research centres in the HVAC industry



- An affordable range of products for when price is the determining factor
- Specifically designed for the HVAC&R industry to meet the stringent demands of your service and install projects
- Manufactured using durable materials and backed by Heatcraft



- A Total Gas Management System supported by a first class, zero emissions Gas2Go decanting and blending facility at Milperra, NSW
- A full product lifecycle service, including cylinder filling from 9kg to 850kg for commissioning large plants, sample analysis and refrigerant reclaim



- A state-of-the-art online resource centre to help you manage your account and streamline the way you do business
- Industry leading project tools help take the guess work out of project estimations
- Easy access to product and price information
- The ability to order online for overnight pick up or delivery

In addition, our wholesale branch network carries world class leading brands that bring years of operational excellence to the HVAC&R industry. Supply partners such as Emerson Climate Technologies, ebm-papst, Danfoss, MM Kembla, Henry Technologies, Hanbell, CPS, Ziehl-Abegg, Dixell, Dorin, Fieldpiece and Schneider Electric provide unsurpassed value, convenience and confidence for our customers.



eCOBoost CO₂ Transcritical Rack

Application range; Low temperature – Up to 100kW

Medium Temperature – Up to 300kW

- This all natural primary refrigerant system is the ultimate solution for sustainable refrigeration system design. It provides an HFC-free refrigeration solution whilst delivering significant lifecycle cost savings
- Efficiency can be optimised using parallel compression and ejector technology
- Modular footprint design allows ease of customisation and installation



Sub-critical CO₂ Rack

Application range; Low Temperature 12kW – 41kW

Medium/High Temperature from 40kW – 300kW

- Digital capacity control on Copeland Scroll™ (lead compressor only)
- Capacity regulation through VSD option on Dorin semi-hermetic compressors
- Optional pre-wired switchboard and control configuration available
- Optional rack mounted auxiliary cooling unit and economiser (de-super heater)

Note: The compressor sub-frame reduces noise and vibration



Traditional Multi-Compressor Rack

Application range; Low Temperature 32kW – 132kW

Medium/High Temperature from 40kW – 300kW

- All components are engineered for optimal performance in full and part load conditions
- Compressors with 4, 6 or 8 cylinders can be capacity regulated via cylinder unloading or VSD
- TraxOil control with isolating valves to a high efficiency oil separator
- Integral control system and wiring are optional time saving features

Note: Copeland compressor models feature the intelligent CoreSense™ Diagnostic & Communication Compressor Module (E2 Network capability)




Specialty Multi-Compressor Rack

Application range; Low Temperature 32kW – 132kW

Medium/High Temperature from 40kW – 300kW

- Split headers and custom connections can be configured on specialty rack systems
- The integral switchboard/control solution can be coupled with VSD, cylinder unloading or digital capacity regulation
- Parallel components, sub-cooling and bypass assemblies can be configured
- Water cooled condenser configuration available

Note: Specialty racks are fully configured to customer specification and verified by the Heatcraft engineering team for suitable application

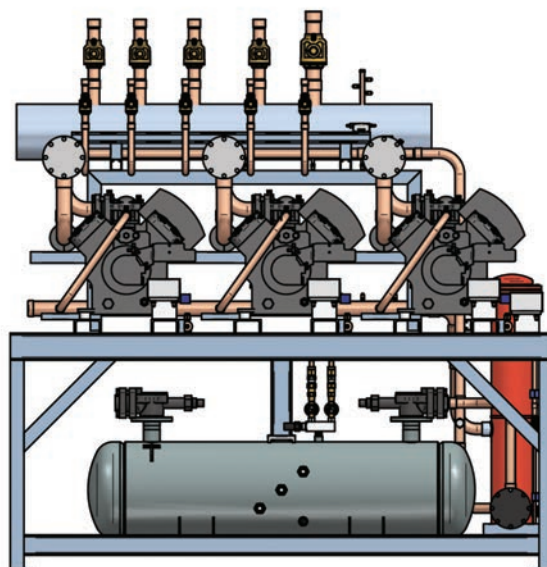


Screw Compressor Basic Unit Pack

Application range; Low Temperature 15kW – 65kW

Medium/High Temperature from 45kW – 400kW

- All components are engineered and selected with full and part load operation considered
- The screw compressors offer capacity control or can be suitably connected to a VSD for system capacity control
- Optional pre-wired rack components, system control & compressor safety circuits

Note: The Screw Packs featuring system wiring are supplied with a pre-configured Dixell® rack control, with programming completed by the Heatcraft engineering team for suitable application

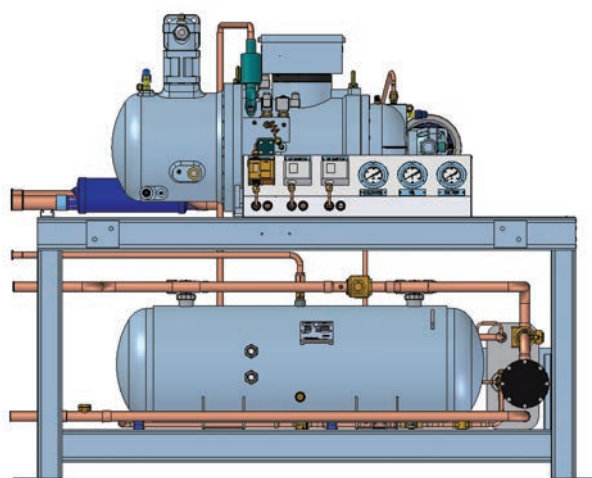


Compact Multi-Compressor Rack

Application range; Low Temperature 11kW – 67kW

Medium/High Temperature from 28kW – 159kW

- Suited to all HFC refrigerants – R134a, R407F, R404A plus others
- Fully insulated suction header and suction filter shell with isolating valve
- Durable, lightweight powder coated frame (mechanically assembled)
- Discharge vibration eliminators connected to a common discharge header. Oil separator and reservoir with TraxOil level control

Note: The compact footprint allows optimal configuration with a remote condenser and liquid receiver combination

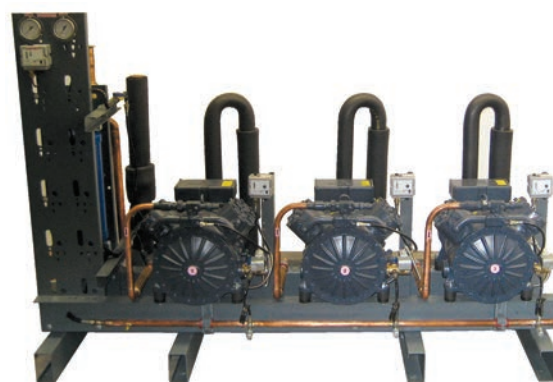

eCompact CO₂ Condensing Unit

Application range; Low temperature 3kW – 10kW

- Cascade CO₂ system offering low GWP and improved energy efficiency
- Low noise and compact footprint offers the benefit of flexibility in unit location
- Available with Copeland Scroll™ Digital compressor or Dorin semi-hermetic compressor fitted with inverter drive, offering optimum capacity control



Multiwave Cascade CO₂/HFC System

**Application range: Low temperature 10kW – 35kW
Medium temperature 30kW – 100kW**

- “Ready-to-install” range with refrigeration control and electrical components combined within a common frame
- State-of-the-art design including the latest Copeland Scroll Digital™ compressors or Dorin semi-hermetic compressors fitted with inverter drive
- Compact footprint for increased flexibility in installation location



Integrated Switchboard System

Application; Available on all Kirby Racks

- Optimised switchboard is factory fitted with electronics and complete rack wiring and shipped in a “ready-to run” configuration, thereby reducing installation and commissioning time
- Fully customisable to meet all types of applications and budgets
- Designed to meet the relevant Australian/New Zealand standards





Nullarbor Condensing Unit

Application range; Low Temperature 0.3kW – 2.2kW
Medium/High Temperature 0.4kW – 4.7kW

- Condensers selections provide assured operation at 45°C ambient and enhance the life of the compressor
- WJ/AW series include liquid line drier, sight glass and HP/LP control for express installation
- Low ambient unit models available for application in colder climates
- Selected unit models are provided complete with a condensate waste tray and discharge heat loop for efficient condensate waste removal

Note: End users save money on power consumption through the increased condenser capacity. The compressors run more efficiently with lower condensing pressures and higher C.O.P.'s



Commander Blue High Ambient Condensing Unit

Application range; Low Temperature 2.6kW – 11.5kW
Medium/High Temperature 4.6 kW – 24.4kW

- Installation costs are reduced on models with the liquid line drier, sight glass and solenoid all standard inclusions
- Proven hermetic compressors with high efficiency models chosen (where applicable)
- Condensers rated for 46°C ambient temperatures for optimum performance
- Low ambient model also available

Note: The high-ambient design provides energy saving benefits (lower running costs) per degree lower ambient year round




Commander Condensing Unit

Application range; Low Temperature 0.8kW – 16.8kW
Medium/High Temperature 1.9 kW – 32.7kW

- Optimised coil design provided. Enhanced heat transfer and increased compressor performance, reliability and reduced unitary life cycle costs
- Ease of installation and service through fully featured unit configuration
- Reduced operating noise levels through design and compressor/condenser engineering
- Optional high efficiency configurations feature EC motors and/or a fully wired and programmed VSD

Note: High efficiency configuration featuring EC motors and/or a fully wired and programmed VSD on semi-hermetic units are available providing energy saving benefits to the end user

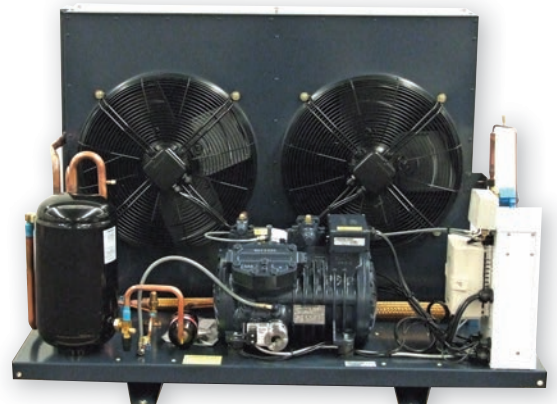



Semi-Hermetic 2 Cylinder

Application range; Low Temperature 0.6kW – 5.6kW

Medium/High Temperature 1.6kW – 13.9kW

- Low noise, minimal vibration and a compact footprint with reduced operational weight provides installers the benefit of flexibility in unit location
- Compact footprint with reduced operational weight
- Pressure control, liquid line drier, sight glass and solenoid are standard feature inclusions
- Reduced installation time a key benefits for the contractor
- Water cooled condenser options available

Note: Integral watercooled configuration available to provide application close coupling (distributed application) for refrigerant reduction




Semi-Hermetic 4 & 6 Cylinder

Application range; Low Temperature 6kW – 37kW

Medium/High Temperature from 14kW – 96kW

- Compact footprint and reduced installation time are key benefits
- High performance Copeland Stream and Dorin compressors available through the range
- Leading performance, efficiency, durability and quiet operation
- Factory fitted wiring and programmed control systems with optional Digital or VSD control available
- Water cooled condenser options available

Note: Copeland compressor models feature the intelligent CoreSense™ Diagnostic & Communication Compressor Module (E2 Network capability)

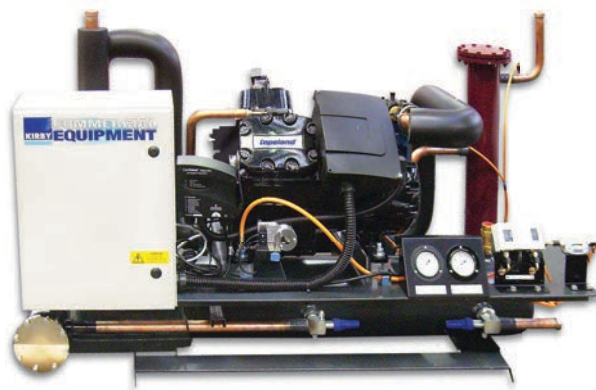



Polar Pack Condensing Unit

Application range; Low Temperature 0.5kW – 4.5kW

Medium/High Temperature 1.3kW – 8.5kW

- Range includes semi-hermetic (PPS) & hermetic (PPH) compressors
- Fully pre-wired including condenser fan speed control as well as motor and phase failure protection
- The package supports fast installation, express commissioning and easy servicing
- Kirby Blue Kote Protection to condenser coil

Note: Condenser fan speed control is standard and controlled by condensing pressure. Select units can be supplied in horizontal airflow configuration allowing flexibility in installation location



Titan Condensing Unit

Application range; Low Temperature 3.5kW – 14.9kW

Medium/High Temperature 9.6kW – 32kW

- Range includes semi-hermetic (PPS) & hermetic (PPH) compressors
- Fully pre-wired including, condenser fan speed control plus motor and phase failure protection (fan speed controlled by condensing pressures)
- Kirby Blue Kote Protection to condenser coil
- Compressor unloading or integral VSD capacity control options available on semi-hermetic units

Note: The range features an optional integral high efficiency configuration; including EC motors and/or a fully wired and programmed VSD. Integral control packages (network capabilities) are another key feature



Centurion Condensing Unit

Application range; Low Temperature 11kW – 32kW

Medium/High Temperature 12kW – 41kW

- Perfect unit to replace aging central plant equipment for both HVAC&R
- Packages can be configured with integral control (network capabilities)
- The Centurion platform provides application on all HFC Refrigerants R134a through to R410A

Note: High efficiency configurations featuring EC motors and/or a fully wired and programmed VSD are available providing energy savings of up to 23%





Fridgebox™ Microchannel Condensing Unit

Application range; Low Temperature 1.5kW – 5.1kW (no suction accumulator) Medium/High Temperature from 3.4kW – 9.7kW

- Hypercore™ microchannel condenser technology (allows reduced refrigerant charge)
- Copeland ZB scroll compressors
- Pre-wired to include optimised condenser fan speed control (high side pressure reference)
- Accessible services connection points and removable service access panels

Note: The Fridgebox™ compact package supports fast installation and optimal service access



Digital Scroll Fridgebox™ Condensing Unit

Application range; Medium Temperature 4.2kW – 12.9kW

- Latest generation Copeland ZB Scroll Digital™ compressors offer capacity modulation from 20% - 100%, perfectly matching demand whilst maximising system efficiency
- High efficiency Hypercore™ microchannel condenser coil technology generation boosts efficiency and reduces the required refrigerant charge to limit environmental impact
- Fully pre-wired including Dixell® XC controller ensures optimal performance



Drop-In Units



Drop-In Packaged Refrigeration Units

Application range; Low Temperature 840W – 2.2kW

Medium/High Temperature from 810W – 3.5kW

- Pre-configured control circuit in a slimline, pre-wired electrical box
- Evaporator coil corrosion protection to medium temp low profile units
- Low temperature units feature real time electric defrost with temperature switch termination
- Medium temperature units feature off cycle defrost

Note: All units are factory run tested and arrive supplied pre-charged with refrigerant for express installation





Cabinet Coolers

Application range; Low Temperature 0.5kW – 4.2kW*

Medium/High Temperature from 0.3kW – 5.2kW*

- Removable, discreet drain tray (housing) which is easily removed for cleaning and service
- Heat exchanger with rifled bore tubing for high performance and exceptional oil return (KC & KCT Series)
- The hinged fan panel offers total access to all elements including; coil, fan, defrost heater and connections (MH Series)
- Glycol application available

Note: The Cabinet and Reach In coolers are optimised for performance to ensure the footprint of the unit remains compact. The low profile design increases shelf and retail display space. *MH Reach In Series.



TA Evaporator

Application range; Medium/High Temperature from 4kW – 16kW

- High efficiency coil includes corrugated aluminium fins and grooved internal copper tubes, low velocity air discharge
- Intelligent housing design and drainage offers for superior drainage and hygienic performance
- The hinged drain pan offers improved accessibility to all the components and the housing is designed to accommodate installation of a condensate pump
- Glycol application available

Note: The casing with integrated fan guards offers improved aesthetics, perfect for open food preparation areas



9000 Series Evaporator

Application range; Low Temperature 1.2kW – 13.6kW

Medium/High Temperature from 1.3kW – 19.8kW

- The front facing quick connect terminal board simplifies wiring for faster install and servicing
- Face heaters allow easy access for maintenance/replacement
- Extended model and capacity range with low frost, heater assisted defrost and EC fan configuration models available
- Separate panels for refrigeration/electrical connections (opp. ends)
- CO₂ coil circuiting part of the 9000 Series (KLC/KMC)
- Glycol application models available

Note: The simple two speed EC fan motor provides users a guaranteed payback with easy maintenance



3C-A CO₂ Evaporator

Application range; Low temperature 1.1kW – 25kW

Medium temperature 1.2kW – 27kW

- Designed for transcritical or high pressure CO₂ applications (60 Bar)
- High efficiency EC fans offer lower energy consumption and longer service life
- Easy, removable side panels and articulated drain pans offer fast and easy access to the coil, fans, defrost heaters and connections
- Eurovent certified performance



Heavy Duty Evaporator

Application range; Low Temperature 9kW – 38kW

Medium/High Temperature 11kW – 53kW

- Ultimate reliability supported by a design that provides simplified installation and improved serviceability
- Reversible drain tray to simplify installation
- Flexible enhanced application range with interchangeable orifice design to optimise performance in various conditions/applications
- Heaters fitted as standard on medium temperature units
- Glycol application models available



Note: Ensured longevity and reliable ongoing performance with quality pre-wired three phase fan motors

NK Heavy Commercial Industrial Unit Cooler

Application range; Low Temperature 18kW – 68kW

Medium/High Temperature 20kW – 110kW

- Three phase fans are available in 630mm and 800mm
- The pre-painted galvanised steel casing offers a high resistance to corrosion and impact damage
- High-efficiency H type fins provide optimal heat exchange for the coil footprint
- Fin spacing options of 6 FPI , 4 FPI or 3 FPI (4, 6, 9 mm)



Note: Glycol circuiting available as an option to complement the Lennox Neosys Chiller available through Heatcraft Australia



KRC Remote Condenser

Application range; R404A 0.8kW – 17kW @ 1KTD

R134a 0.7kW – 16kW @ 1KTD

- Optimised coil design incorporating inner grooved tube for enhanced heat transfer
- Kirby Blue Koted fins for optimal UV protection and corrosion resistance
- Header clearance holes ensure the end/divider plates prevent premature fatigue, failure and/or leaks
- Powder coated galvanised casing for extended life
- Dry cooler application available

Note: The KRC condenser has been designed to accommodate the high pressure refrigerants like R410A and other fluids



WRC Remote Condenser

Application range; R404A 11kW – 61kW @ 1KTD

R134a 10kW – 57kW @ 1KTD

- Fan configurations include EC, 6 Pole, 8 Pole, 800mm and 910mm
- AxiTop® models feature high performance ebm-papst HyBlade® EC Axial fan motors and AxiTop® Diffuser
- All fan motors are factory wired to a junction box for ease of installation
- Units can be installed in Vertical or Horizontal fan configuration
- Floating coil technology & rifle bore tube for improved reliability and performance
- Kirby Blue Kote fin protection supplied as standard
- Dry cooler application available

Note: Guaranteed longevity and performance through the enhanced coil surface to airflow ratio
HyBlade® and AxiTop® are registered trademarks of ebm-papst Mulfingen GmbH & Co. KG



MXW EC Condenser

Application range; R404A 22kW – 112kW @ 1KTD

R134a 21kW – 104kW @ 1KTD

- EC fans are offered as standard and run more efficiently due to lower static
- The modular configuration provides the option to incorporate multiple refrigerant circuits in a singular condenser, which reduces installation time and space requirements
- 75% reduction in refrigerant operating charge compared to traditional coil designs
- See also the NRG flatbed microchannel condensers with application range R404A 6kW - 26kW @ 1KTD
R134a 6kW - 24kW @ 1KTD





Note: Coil surface fouling is minimised and does not lose surface effectivity resulting in lifetime performance that is far superior to conventional coils (minimal heat exchange losses)















Our OEM product features optional integrated control and wiring solutions incorporating Emerson, Dixell & Danfoss refrigeration system and energy management controllers










Kirby Refrigeration Product Selector

						
		ECOBOOST CO ₂ TRANSCRITICAL RACK	SUB-CRITICAL CO ₂ RACK	TRADITIONAL MULTI-COMPRESSOR RACK	SPECIALTY MULTI-COMPRESSOR RACK	SCREW COMPRESSOR BASIC UNIT PACK
SEGMENT	NOMINAL CAPACITY RANGE	Up to 300kW	12kW - 300kW	32kW - 300kW	32kW - 300kW	15kW - 400kW
Retail	Supermarket	●	●	●	●	
	Convenience Stores					
	Fast Food					
	Mixed Business					
	Liquor			●		
	Meat-Poultry – Dairy					
	Seafood					
	Cakes, Confectionery, Bakery					
	Speciality Refrigerated Storage & Display					
Cold Storage Industrial - Commercial	Bulk General Products Distribution Storage Facility	●	●	●	●	●
	Bulk Holding Storage – Long – short Term	●	●	●	●	●
	General Coolrooms & Appliances	●			●	●
	Multipurpose Temperature Controlled	●	●		●	●
	Fresh Farmed & Processed Products Wet/Dry	●	●	●	●	●
	High & Low Volume Storage	●	●		●	●
	Speciality Liquids & Solids	●	●		●	●
Industry Light - Heavy	Industrial Process Cooling & Heating	●	●		●	●
	Food Preparation – Processing & Packaging	●	●		●	●
	Speciality Materials & Goods Conditioning	●	●		●	●
	Pharmaceutical	●	●		●	●
	Fishing Boat					●
	Laboratory	●	●		●	
Hospitality	Restaurants – Café's					
	Clubs – Pubs				●	
	Sports & Recreational Centres				●	●
	Catering Preparation & Storage				●	
	General Entertainment – Land					
	General Entertainment – Sea & Rail					
Institutional	Hospitals/Healthcare Equipment	●	●		●	
	Aged Care – Catering & Equipment	●	●		●	
	Hospitals – Catering & Equipment	●	●		●	
	Educational – Training Fixtures & Equipment					
	Government Agencies – Facilities Equipment & Storage					
HVAC	Air Conditioning Equipment				●	●
	Work Room Conditioning					●
	Speciality Component Cooling (Dry Rooms – Switch Gear)					

								
COMPACT MULTI-COMPRESSOR RACK	ECOMPACT CO ₂ CONDENSING UNIT	MULTIWAVE CASCADE CO ₂ /HFC SYSTEM	NULLARBOR CONDENSING UNIT	COMMANDER BLUE HIGH AMBIENT CONDENSING UNIT	COMMANDER CONDENSING UNIT	BASIC SEMI-HERMETIC 2 CYLINDER	BASIC SEMI-HERMETIC 4&6 CYLINDER	POLAR PACK CONDENSING UNIT
11kW - 159kW	3kW - 10kW	10kW - 100kW	0.3kW - 4.7kW	2.6kW - 24.4kW	0.8kW - 32.7kW	0.6kW - 13.9kW	6kW - 96kW	0.5kW - 8.5kW
	●	●	●	●	●	●	●	●
	●		●	●	●			●
	●		●	●	●	●		●
	●		●	●	●			●
	●		●	●	●		●	●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
		●						
		●				●	●	
●					●		●	
●		●			●		●	
●		●			●		●	
●		●			●		●	
●		●			●		●	
●		●			●		●	
●		●		●	●		●	
●		●		●	●		●	
	●	●	●	●	●	●	●	●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
	●		●	●	●			●
			●				●	
							●	
			●					●

Kirby Refrigeration Product Selector

						
		TITAN CONDENSING UNIT	CENTURION CONDENSING UNIT	FRIDGEBOX MICROCHANNEL CONDENSING UNIT	DIGITAL SCROLL FRIDGEBOX CONDENSING UNIT	DROP-IN PACKAGED REFRIGERATION UNIT
SEGMENT	NOMINAL CAPACITY RANGE	3.5kW - 32kW	11kW - 41kW	1.5kW - 9.7kW	4.2kW - 12.9kW	840W - 3.5kW
Retail	Supermarket	●	●	●	●	●
	Convenience Stores	●	●	●	●	●
	Fast Food	●	●	●	●	●
	Mixed Business	●	●	●	●	●
	Liquor	●	●	●	●	●
	Meat-Poultry – Dairy	●	●	●	●	●
	Seafood	●	●	●	●	●
	Cakes, Confectionery, Bakery	●	●	●	●	●
	Speciality Refrigerated Storage & Display	●	●	●	●	
Cold Storage Industrial – Commercial	Bulk General Products Distribution Storage Facility					
	Bulk Holding Storage – Long – short Term		●			
	General Coolrooms & Appliances	●	●	●	●	●
	Multipurpose Temperature Controlled	●	●	●	●	●
	Fresh Farmed & Processed Products Wet/Dry	●	●	●	●	●
	High & Low Volume Storage	●	●	●	●	●
	Speciality Liquids & Solids	●	●	●	●	
Industry Light - Heavy	Industrial Process Cooling & Heating	●	●	●	●	
	Food Preparation – Processing & Packaging	●	●	●	●	●
	Speciality Materials & Goods Conditioning	●	●	●	●	
	Pharmaceutical	●	●	●	●	●
	Fishing Boat					
	Laboratory	●	●	●	●	●
Hospitality	Restaurants – Café's	●		●	●	●
	Clubs – Pubs	●	●	●	●	●
	Sports & Recreational Centres	●	●	●	●	●
	Catering Preparation & Storage	●	●	●	●	●
	General Entertainment – Land	●	●	●	●	●
	General Entertainment – Sea & Rail					
Institutional	Hospitals/Healthcare Equipment	●	●	●	●	●
	Aged Care – Catering & Equipment	●	●	●	●	●
	Hospitals – Catering & Equipment	●	●	●	●	●
	Educational – Training Fixtures & Equipment	●	●	●	●	●
	Government Agencies - Facilities Equipment & Storage	●	●	●	●	●
HVAC	Air Conditioning Equipment					
	Work Room Conditioning		●			
	Speciality Component Cooling (Dry Rooms – Switch Gear)					

								
CABINET COOLERS	TA EVAPORATOR	9000 SERIES EVAPORATOR	3C-A CO ₂ EVAPORATOR	HEAVY DUTY EVAPORATOR	NK HEAVY COMMERCIAL INDUSTRIAL UNIT COOLER	KRC REMOTE AIR COOLED CONDENSER	WRC REMOTE AIR COOLED CONDENSER	MXW EC MICRO CHANNEL REMOTE AIR COOLED CONDENSER
0.5kW - 5.2kW	4kW - 16kW	1.2kW - 19.8kW	1.1kW - 27kW	9kW - 53kW	18kW - 110kW	0.8kW - 17kW	11kW - 61kW	22kW - 112kW
●	●	●	●	●		●	●	●
●	●	●	●			●		
●		●	●			●		
●		●	●					
●		●	●			●	●	●
●	●	●	●	●				
●	●	●	●	●				
●	●	●	●	●				
		●	●	●	●		●	●
		●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
		●	●	●	●	●	●	●
		●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●		●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●	●
		●	●	●		●	●	
●	●	●	●	●		●	●	
●	●	●	●	●				
●		●	●	●		●	●	
●	●	●	●	●		●		
●	●	●	●	●		●	●	
●	●	●	●	●		●		
●	●	●	●	●		●	●	
●	●	●	●	●		●	●	●
●	●	●	●			●	●	●
●	●	●	●			●	●	●
●	●							




The contents of this brochure are copyright protected and may not be reproduced in any form without the written consent of Heatcraft. Recommendations and advice regarding the use of the products described in this publication are to be taken as a guide only and are given without liability on the part of the company or its employees. As Heatcraft continually improves its product range and processes, Heatcraft reserves the right to change product specifications without any prior notification. Please refer to the Heatcraft website for the latest version of this publication. The purchaser should independently determine the suitability of the product for the intended use and application and that the product complies with relevant standards. Heatcraft accepts no responsibility for loss or damage (direct or indirect and including consequential loss, loss of profits or opportunity and economic loss) however arising which results from any errors or omissions in the information contained in this publication or arising from the use or application of the information contained herein.

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Why choose Heatcraft:

- 1 Comprehensive range of HVAC&R
- 2 A national network of branches across Australia and New Zealand and growing
- 3 Globally supported by our parent company Lennox International Inc.
- 4 The ability to leverage our global connections to deliver superior solutions
- 5 A dedicated national team of Account Managers and Field Engineers
- 6 Online 24/7 business solutions to improve your productivity
- 7 Leading brands backed by decades of innovation and experience
- 8 A distribution strategy in place to support your business needs
- 9 A uniquely one step distributor from product design, supply to after sales and support
- 10 We are Customer Driven. Your satisfaction is our priority

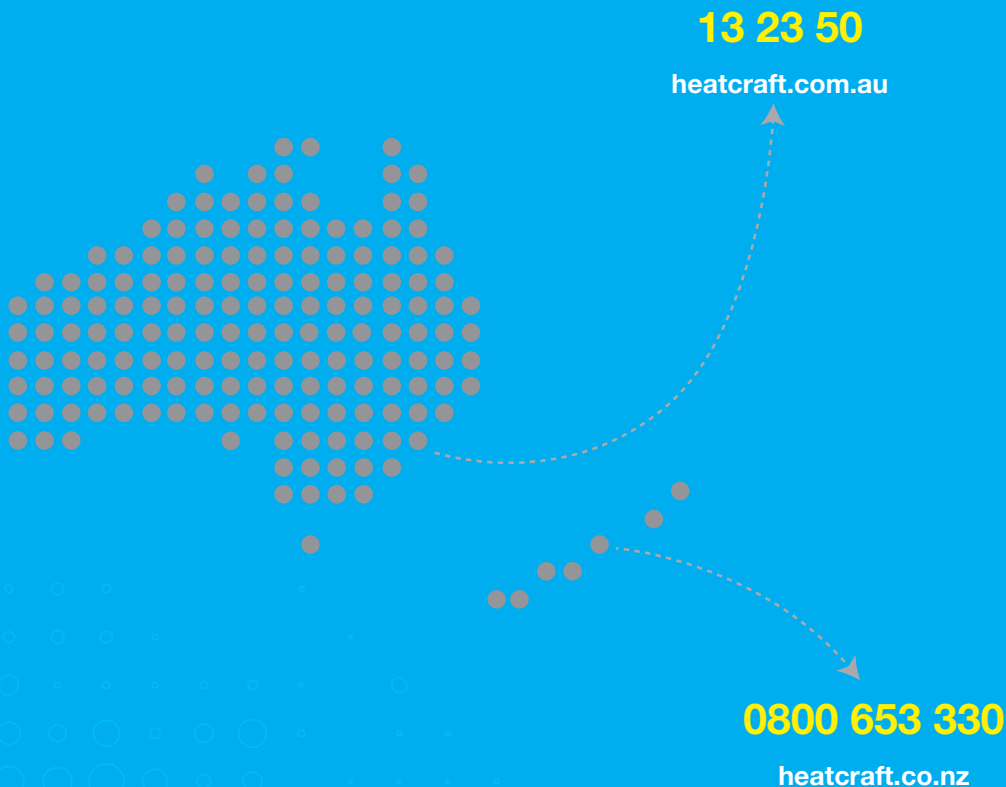

® and ™ - Registered Trade Mark and Trade Mark of Heatcraft Australia Pty Ltd

© Copyright 2017 Heatcraft Australia Pty Ltd

Heatcraft Australia continually strives to improve products and processes. We reserve the right to modify product features without notice. Information is correct at time of printing.